

# 1D1C DOOR FRAME AND DOOR PANEL FIXING GUIDE



Left 2 pcs – Top door jamb.  
Center 2 pcs – Side door jamb  
Right pc – Front door jamb



1. Apply bonding agent to groove portion of the side door jamb



2. Push groove to grip the wing portion of the steel frame front studs



3. Apply bonding agent to back of front jamb



4. Press and bond front jamb to existing wall with additional fasteners if necessary.



5. Placed top door jamb against aluminium track



6. Use screws or bonding agent to fix top door jamb to track



7. Slot in Rollers thru the track opening at the front



8. Mount steel hanging brackets to door panel

**CAUTION :** Synchronize bracket bolt-hole and door panel mounting direction correctly to avoid obstruction from top door jamb. Alternatively, hang the door panel first then mount the top door jambs later.




9. Hang door panel with the steel hanging bracket catching the Roller bolt



10. Turn the bolt head to adjust gap below door panel and its verticality



11. Cover up track with the other top door jamb

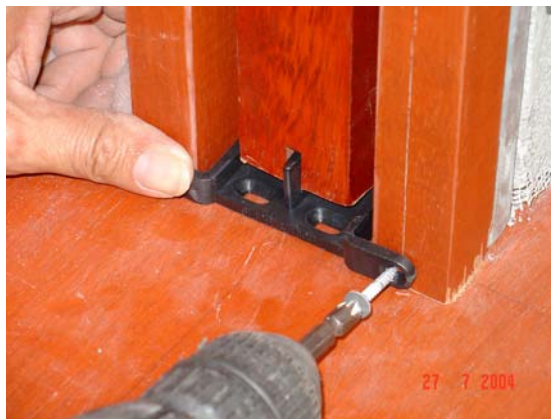

12. Fix plastic floor guide to side door jamb

